

## BASIC FLOW INDICATOR

## Fluidwell F010

### Product features

- flowrate indicator
- Intrinsically Safe option

### Operator information

- flowrate
- units of measurement



### Description

The F010 display offers a basic level of functionality. Flowrate is displayed in 17 mm (0.67") high digits simultaneously with the units of measurement. The relevant time and measuring units can be selected easily. The F010 features a seven digit K-Factor and a panel-mount ABS case. A wall-mount option is also available.

The F010-XI can be used in hazardous areas: to classification EEx ia IIB T4.



Standard:  
Panel-mount casing IP 65



Option HD:  
ABS wall-mount casing IP 65



Option HA:  
Aluminium casing IP 67

### Signal Input

**P** Pulse, coil, Namur                      **U** (0)2-10V  
**A** (0)4-20mA

### Options

**PF** 12-24V AC/DC + EM-relays

**PG** Option PF with backlight

**PL** Input loop-powered

**PM** 80-240V AC + EM-relays

**HB** Panel mount

**HD** ABS casing


**PB** Battery powered

**PN** Option PM with backlight

**XI** Intrinsically safe

**XD** EExd enclosure - 1 key

**XF** EExd enclosure - 3 keys

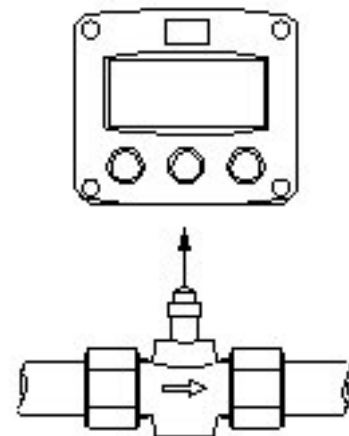

[www.duranmatic.nl](http://www.duranmatic.nl)

**DURANMATIC**

Postbus 770, 3300 AT Dordrecht (NL) - [www.duranmatic.nl](http://www.duranmatic.nl)  
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: [info@duramatic.nl](mailto:info@duramatic.nl)