

## BASIC FLOWRATE INDICATOR / TOTALIZER

## Fluidwell F012

### Product features

- flowrate indicator and totalizer.
- Intrinsically Safe option

### Operator information

- flowrate - total
- accumulated total
- units of measurement



### Description

The F012 is a popular display offering a basic level of functionality. Total quantity is displayed in 17mm (0.67") high digits simultaneously with flowrate -8mm (0.31") digits. Accumulated total is displayed after pressing the select key. The Total can be reset to zero. Different engineering units can be selected for flowtotal and flowrate.

The FO12-XI can be used in hazardous areas: to classification EEx ia IIB T4.



Standard:  
Panel-mount casing IP 65



Option HD:  
ABS wall-mount casing IP 65



Option HA:  
Aluminium casing IP 67

### Signal Input

**P** Pulse, coil, Namur                      **U** (0)2-10V  
**A** (0)4-20mA

### Options

**PF** 12-24V AC/DC + EM-relays

**PG** Option PF with backlight

**PL** Input loop-powered

**PM** 80-240V AC + EM-relays

**HB** Panel mount

**HD** ABS casing


**PN** Option PM with backlight

**XI** Intrinsically safe

**XD** EExd enclosure - 1 key

**XF** EExd enclosure - 3 keys

**PB** Battery powered

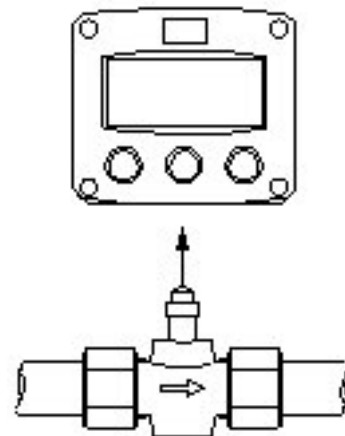

# DURANMATIC

Postbus 770, 3300 AT Dordrecht (NL) - [www.duranmatic.nl](http://www.duranmatic.nl)  
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail:  
[info@duramatic.nl](mailto:info@duramatic.nl)