

## BASIC FLOWRATE INDICATOR / TOTALIZER / MONITOR

## Fluidwell F013

### Product features

- high / low alarms
- flowrate / totalizer
- one alarm output
- intrinsically Safe option

### Operator information

- flowrate and total
- accumulated total
- alarm set-points
- units of measurement



### Description

The F013 is a basic flowrate indicator and totalizer with a continuous flowrate monitoring feature. It offers the facility to set high and low flowrate values and to transmit an alarm condition via a single alarm relay output. During alarm conditions, a clear alarm message is displayed on-screen and the output is rapidly switched.

Flowrate is displayed in 17mm (0.67") high digits.

With option "XI" the units can be used in hazardous areas: to classification EEx ia IIB T4.



Standard:  
Panel-mount casing IP 65



Option HD:  
ABS wall-mount casing IP 65



Option HA:  
Aluminium casing IP 67

### Signal Input

**P** Pulse, coil, Namur                      **U** (0)2-10V  
**A** (0)4-20mA

### Options

**PF** 12-24V AC/DC + EM-relays

**PG** Option PF with backlight

**PL** Input loop-powered

**PM** 80-240V AC + EM-relays

**HB** Panel mount

**HD** ABS casing


**PN** Option PM with backlight

**XI** Intrinsically safe

**XD** EExd enclosure - 1 key

**XF** EExd enclosure - 3 keys

**PB** Battery powered

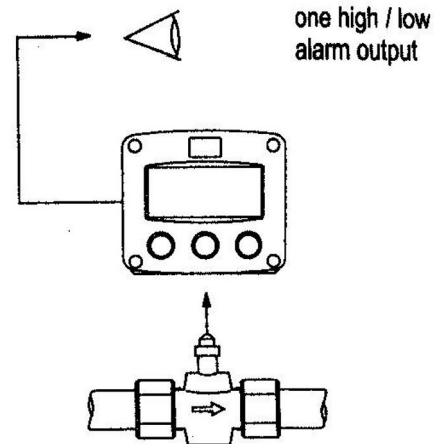

[www.duranmatic.nl](http://www.duranmatic.nl)

**DURANMATIC**

Postbus 770, 3300 AT Dordrecht (NL) - [www.duranmatic.nl](http://www.duranmatic.nl)  
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: [info@duramatic.nl](mailto:info@duramatic.nl)