

BASIC FLOWRATE INDICATOR / TOTALIZER WITH PULSE OUTPUT

Fluidwell F014

Product features

- pulse output ref: total flow
- flowrate / totalizer
- intrinsically Safe option

Operator information

- flowrate and total
- accumulated total
- units of measurement



Description

The F014 is a basic flowrate indicator and totalizer with a pulse output which reflects the total count on the display. The output can be scaled to give a pulse every 7.5 liters for example. Total quantity is displayed in 17mm (0.67") high digits simultaneously with flowrate. Accumulated total is displayed after pressing the select key. The Total can be reset to zero.

The FO14-XI can be used in hazardous areas: to classification EEx ia IIB T4.



Standard:
Panel-mount casing IP 65



Option HD:
ABS wall-mount casing IP 65



Option HA:
Aluminium casing IP 67

Signal Input

P Pulse, coil, Namur **U** (0)2-10V
A (0)4-20mA

Options

PF 12-24V AC/DC + EM-relays

PG Option PF with backlight

PL Input loop-powered

PM 80-240V AC + EM-relays

HB Panel mount

HD ABS casing


PB Battery powered

PN Option PM with backlight

XI Intrinsically safe

XD EExd enclosure - 1 key

XF EExd enclosre - 3 keys

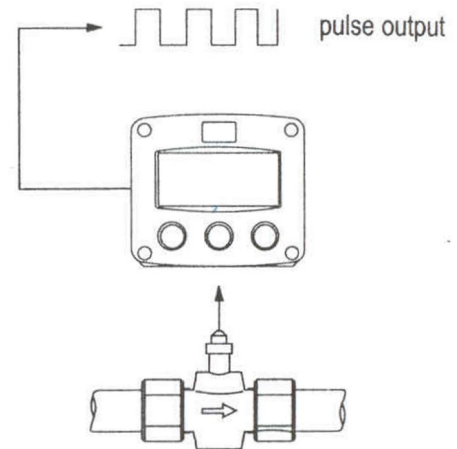

www.duranmatic.nl

DURANMATIC

Postbus 770, 3300 AT Dordrecht (NL) - www.duranmatic.nl
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: info@duramatic.nl