

## BASIC LEVEL INDICATOR

## Fluidwell F070

### Product features

- (0)4-20mA,  
(0)2-10V DC,  
0-100 kOhm input
- digital filter to stabilize reading
- loop and battery powered option
- intrinsically Safe option

### Operator information

- actual level
- units of measurement

### Description

The F070 displays the level with the 17mm (0.67") digits. The relevant measuring units can easily be selected for display. The unit is 8-30V DC powered as standard with an option for battery powered and loop-powered.

The settings are easily entered via the user friendly menu structure. All settings are stored in EEPROM memory. The ABS casing can be panel-mounted; wall-mount is optional.

The F070-XI can be used in hazardous areas: to classification EEx ia IIB T4.

Further options are available.



Standard:  
Panel-mount casing IP 65



Option HD:  
ABS wall-mount casing IP 65



Option HA:  
Aluminium casing IP 67

### Signal Input

**P** Pulse, coil, Namur                      **U** (0)2-10V

**A** (0)4-20mA

### Options

**PF** 12-24V AC/DC + EM-relays

**PG** Option PF with backlight

**PL** Input loop-powered

**PM** 80-240V AC + EM-relays

**HB** Panel mount

**PN** Option PM with backlight


**HD** ABS casing

**XI** Intrinsically safe

**XD** EExd enclosure - 1 key

**XF** EExd enclosure - 3 keys

**PB** Battery powered

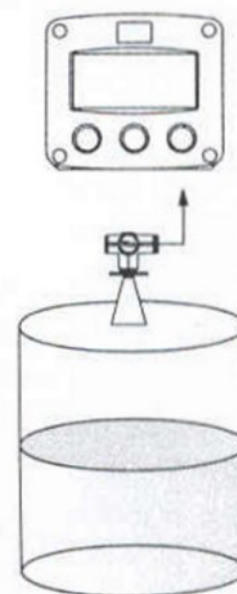

[www.duranmatic.nl](http://www.duranmatic.nl)

**DURANMATIC**

Postbus 770, 3300 AT Dordrecht (NL) - [www.duranmatic.nl](http://www.duranmatic.nl)  
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: [info@duramatic.nl](mailto:info@duramatic.nl)