

DUAL PRESSURE INDICATOR

Product features

- dual input unit
- two separate inputs for (0)4-20mA, or (0) 2-10V DC.
- loop and battery powered
- digital filter to stabilize reading
- 5-24 V AC/DC powered
- RS232/485 option
- Intrinsically safe option

Operator Information

- pressure A and B
- measuring units

Description

The 0151 offers an economical alternative: it provides the basic functionality of two complete pressure displays in a single unit. Pressure input A or B may be selected manually or with the automatic toggle-function. Also, both pressures can be displayed simultaneously, one with the large 17mm digits and the other with 8mm digits. The preferred measuring units for each transducer are easily selected and different units may be used. All settings are stored in EEPROM memory. With the battery option, the 0151 can measure from 0mA or 0V DC without external power and the display remains live when the 4mA loop is switched off ! With option "XI" the units can be used in hazardous areas: to classification EExialIBT4. Note: further options are also available.

Signal Input

A (0)4-20mA

U (0)2-10V

Options

CB RS232 - Modbus	PG Option PF with backlight
CH RS485 - Modbus - 2-Wire	PL Input loop-powered
CI RS485 - Modbus - 4-Wire	PM 80-240V AC + EM-relays
HB Panel mount	PN Option PM with backlight
HD ABS casing	XI Intrinsically safe
IC Three control keys	XD EExd enclosure - 1 key
PA Battery powered	XF EExd enclosre - 3 keys
PF 12-24V AC/DC + EM-relays	

Fluidwell F151




Standard:
Panel-mount casing IP 65




Option HD:
ABS wall-mount
casing IP 65



Option HA:
Aluminium casing IP 67



RS232/RS485
Modbus
(option)

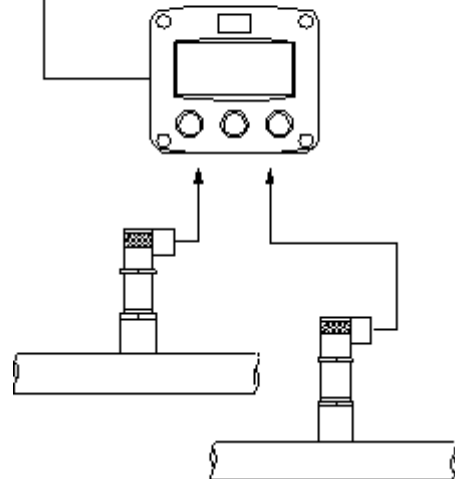

www.duranmatic.nl

DURANMATIC

Postbus 770, 3300 AT Dordrecht (NL) - www.duranmatic.nl
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: info@duramatic.nl