

## BASIC TOTALIZER

## Fluidwell F011

### Product features

- Totalizer
- Intrinsically Safe option

### Operator information

- total - resettable
- accumulated total
- units of measurement



### Description

The F011 is a pure totalizer. Total is displayed in 17mm (0.67") high digits simultaneously with the accumulated total. Total can be reset by pressing the clear button twice. The accumulated total can register up to and including 11 digits and is frequently backed-up in EEPROM memory. The F011 has seven digit K-Factor.

The F011-XI can be used in hazardous areas: to classification EEx ia IIB T4.



Standard:  
Panel-mount casing IP 65



Option HD:  
ABS wall-mount casing IP 65



Option HA:  
Aluminium casing IP 67

### Signal Input

**P** Pulse, coil, Namur                      **U** (0)2-10V  
**A** (0)4-20mA

### Options

**PF** 12-24V AC/DC + EM-relays

**PG** Option PF with backlight

**PL** Input loop-powered

**PM** 80-240V AC + EM-relays

**HB** Panel mount

**HD** ABS casing


**PN** Option PM with backlight

**XI** Intrinsically safe

**XD** EExd enclosure - 1 key

**XF** EExd enclosure - 3 keys

**PB** Battery powered

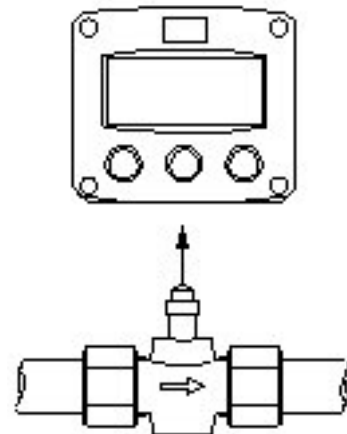

[www.duranmatic.nl](http://www.duranmatic.nl)

**DURANMATIC**

Postbus 770, 3300 AT Dordrecht (NL) - [www.duranmatic.nl](http://www.duranmatic.nl)  
Tel: +31(0)78-6310599 - Fax: +31(0)78-6131133 - E-mail: [info@duramatic.nl](mailto:info@duramatic.nl)